


Curve ASME B16.9 long radius (R=1,5 D) Long radius ASME B16.9 Elbows

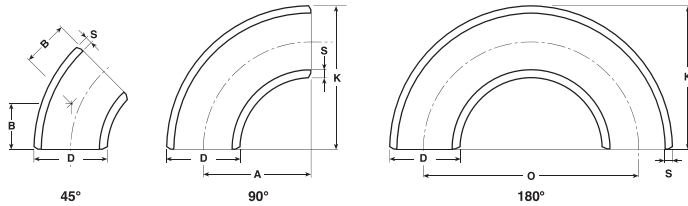

* a richiesta
* on application

Tolleranze dimensionali:
Curve con dimensioni o spessori particolari: a richiesta (-)

Dimensional tolerances:
Elbows with special thickness and size: on application (-)

A [mm]	B [mm]	O [mm]	K [mm]	NPS	D [mm]	S=SCHEDULE				
						SCH. STD	SCH. XS	SCH. 10	SCH. 20	SCH. 30
38,1	15,9	76,2	47,6	½"	21,3	2,77	3,73	—	—	—
38,1	19,1	76,2	50,9	¾"	26,7	2,87	3,91	—	—	—
28,6*	11,1*	57,2*	42,9*	¾"	26,7	2,87	3,91	—	—	—
38,1	22,2	76,2	55,6	1"	33,4	3,38	4,55	—	—	—
47,6	25,4	95,2	69,8	1¼"	42,2	3,56	4,85	—	—	—
57,2	28,6	114,3	82,5	1½"	48,3	3,68	5,08	—	—	3,18
76,2	34,9	152,4	106,4	2"	60,3	3,91	5,54	—	—	3,18
95,2	44,4	190,5	131,8	2½"	73,0	5,16	7,01	—	—	4,78
114,3	50,8	228,6	158,8	3"	88,9	5,49	7,62	—	—	4,78
133,4	57,2	266,7	184,2	3½"	101,6	5,74	8,08	—	—	4,78
152,4	63,5	304,8	209,6	4"	114,3	6,02	8,56	—	—	4,78
190,5	79,4	381,0	261,9	5"	141,3	6,55	9,52	—	—	—
228,6	95,2	457,2	312,7	6"	168,3	7,11	10,97	—	—	—
304,8	127,0	609,6	414,3	8"	219,1	8,18	12,70	—	6,35	7,04
381,0	158,8	762,0	517,5	10"	273,0	9,27	12,70	—	6,35	7,80
457,2	190,5	914,4	619,1	12"	323,8	9,52	12,70	—	6,35	8,38
533,4	222,2	1066,8	711,2	14"	355,6	9,52	12,70	6,35	7,92	9,52
609,6	254,0	1219,2	812,8	16"	406,4	9,52	12,70	6,35	7,92	9,52
685,8	285,8	1371,6	914,4	18"	457,2	9,52	12,70	6,35	7,92	11,12
762,0	317,5	1524,0	1016,0	20"	508,0	9,52	12,70	6,35	9,52	12,70
838,2	342,9	1676,4	1117,6	22"	558,8	9,52	12,70	6,35	9,52	12,70
914,4	381,0	1828,8	1219,2	24"	609,6	9,52	12,70	6,35	9,52	14,25
990,6	406,0	—	1320,8	26"	660,4	9,52	12,70	7,92	12,70	—
1066,8	438,0	—	1422,4	28"	711,2	9,52	12,70	7,92	12,70	15,88
1143,0	470,0	—	1524,0	30"	762,0	9,52	12,70	7,92	12,70	15,88
1219,2	502,0	—	1625,6	32"	812,8	9,52	12,70	7,92	12,70	15,88
1295,4	533,0	—	1727,2	34"	863,6	9,52	12,70	7,92	12,70	15,88
1371,6	565,0	—	1828,8	36"	914,4	9,52	12,70	7,92	12,70	15,88
1448,0	600,0	—	1930,5	38"	965,0	9,52	12,70	—	—	—
1524,0	632,0	—	2032,0	40"	1016,0	9,52	12,70	—	—	—
1600,0	660,0	—	2134,0	42"	1066,8	9,52	12,70	—	—	—
1676,0	695,0	—	2235,0	44"	1118,0	9,52	12,70	—	—	—
1753,0	727,0	—	2336,0	46"	1168,4	9,52	12,70	—	—	—
1829,0	759,0	—	2438,0	48"	1219,2	9,52	12,70	—	—	—

