


Flange a collarino a saldare di testa UNI EN 1092-1 PN64 / PN100 (EXUNI 2285-67 PN64 UNI 2286-67 PN100)

TIPO 11B

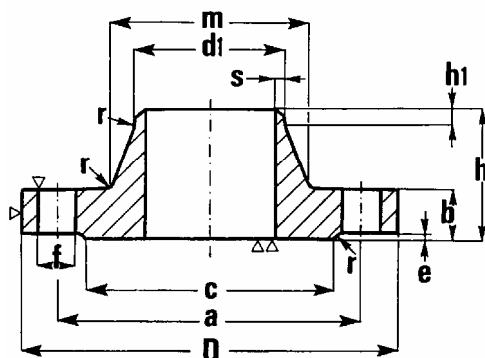

DN	Ø TUBO ISO	d1 ISO	D	a	m ISO	c	h	b	h1	e	r	s	f	VITI	N. FORI	Kg
----	---------------	-----------	---	---	----------	---	---	---	----	---	---	---	---	------	------------	----

UNI EN 1092-1 PN63

DAL DN 10 AL DN 40 IMPIEGARE FLANGE PN 100																
50	60,3	61,5	180	135	82	102	62	26	10	3	6	2,9	22	M20	4	4,5
65	76,1	77	205	160	98	122	68	26	12	3	6	3,2	22	M20	8	5,5
80	88,9	90	215	170	112	138	72	30	12	3	8	3,6	22	M20	8	6,5
100	114,3	115,5	250	200	138	162	78	32	12	3	8	4,0	25	M24	8	9,5
125	139,7	141	295	240	168	188	88	34	12	3	8	4,5	30	M27	8	14,5
150	168,3	170,5	345	280	202	218	95	36	12	3	10	5,6	33	M30	8	21,5
200	219,1	221	415	345	256	285	110	46	16	3	10	7,1	36	M33	12	34,0
250	273	275	470	400	316	345	125	54	18	3	12	8,8	36	M33	12	48,0
300	323,9	326	530	460	372	410	140	62	18	4	12	11,0	36	M33	16	67,5
350	355,6	357,5	600	525	420	465	150	72	20	4	12	12,5	39	M36	16	97,5
400	406,4	408,5	670	585	475	535	160	78	20	4	12	14,2	42	M39	16	129,0

UNI EN 1092-1 PN100

10	17,2	18	100	70	32	40	45	20	6	2	4	1,8	14	M12	4	1,0
15	21,3	22,5	105	75	34	45	45	20	6	2	4	2,0	14	M12	4	1,0
20	26,9	28	130	90	42	58	48	22	8	2	4	2,6	18	M16	4	2,0
25	33,7	34,5	140	100	52	68	58	24	8	2	4	2,6	18	M16	4	2,5
32	42,4	43,5	155	110	62	78	60	24	8	2	6	2,9	22	M20	4	3,0
40	48,3	49,5	170	125	70	88	62	26	10	3	6	2,9	22	M20	4	4,0
50	60,3	61,5	195	145	90	102	68	28	10	3	6	3,2	25	M22	4	6,0
65	76,1	77	220	170	108	122	76	30	12	3	6	3,6	25	M22	8	7,5
80	88,9	90	230	180	120	138	78	32	12	3	8	4,0	25	M22	8	9,0
100	114,3	115,5	265	210	150	162	90	36	12	3	8	5,0	30	M27	8	13,0
125	139,7	141	315	250	180	188	105	40	12	3	8	6,3	33	M30	8	21,0
150	168,3	170,5	355	290	210	218	115	44	12	3	10	7,1	33	M30	12	28,0
200	219,1	221	430	360	278	285	130	52	16	3	10	10,0	36	M33	12	50,0
250	273	275	505	430	340	345	157	60	18	3	12	12,5	39	M36	12	81,0
300	323,9	326	585	500	400	410	170	68	18	4	12	14,2	42	M39x3	16	118,0
350	355,6	357,5	655	560	460	465	189	74	20	4	12	16,0	48	M45x3	16	167,5
400	406,4	408,5	715	620		535							48	M45	16	220,0