


90° ELBOW
Coude 90°

Class 3000 lbs. - 6000 lbs.
Dimensions: ASME B 16.11
Thread: ASME B 1.20.1

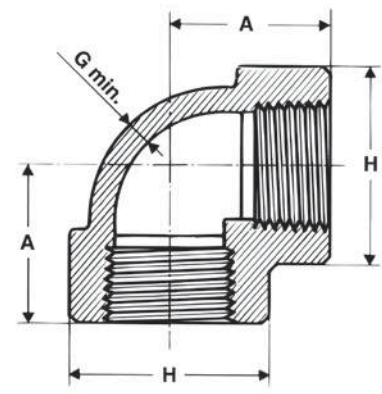


Nominal pipe size Diamètre nominal	3000						6000					
	A		H		G		A		H		G	
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
1/4	0.97	25	1.00	25	0.130	3,30	1.12	28	1.31	33	0.260	6,60
3/8	1.12	28	1.31	33	0.138	3,51	1.31	33	1.50	38	0.275	6,98
1/2	1.31	33	1.50	38	0.161	4,09	1.50	38	1.81	46	0.321	8,15
3/4	1.50	38	1.81	46	0.170	4,32	1.75	44	2.19	56	0.336	8,53
1	1.75	44	2.19	56	0.196	4,98	2.00	51	2.44	62	0.391	9,93
1 1/4	2.00	51	2.44	62	0.208	5,28	2.38	60	2.97	75	0.417	10,59
1 1/2	2.38	60	2.97	75	0.219	5,56	2.50	64	3.31	84	0.436	11,07
2	2.50	64	3.31	84	0.281	7,14	3.25	83	4.00	102	0.476	12,09
2 1/2	3.25	83	4.00	102	0.301	7,65	3.75	95	4.75	121	0.602	15,29
3	3.75	95	4.75	121	0.348	8,84	4.19	106	5.75	146	0.655	16,64
4	4.50	114	6.00	152	0.440	11,18	4.50	114	6.00	152	0.735	18,67

5" and 6" Available on request (Forgings available from stock) Manufacturer standard

45° ELBOW
Coude 45°

Class 3000 lbs. - 6000 lbs.
Dimensions: ASME B 16.11
Thread: ASME B 1.20.1

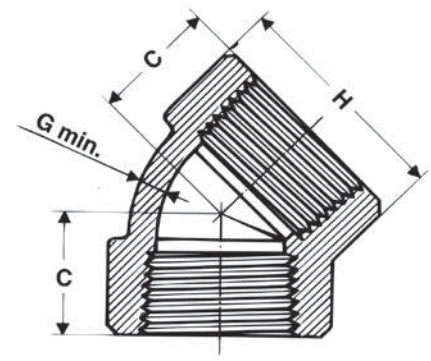

Nominal pipe size Diamètre nominal	3000						6000					
	C		H		G		C		H		G	
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
1/4	0.75	19	1.00	25	0.130	3,30	0.88	22	1.31	33	0.260	6,60
3/8	0.88	22	1.31	33	0.138	3,51	1.00	25	1.50	38	0.275	6,98
1/2	1.00	25	1.50	38	0.161	4,09	1.12	28	1.81	46	0.321	8,15
3/4	1.12	28	1.81	46	0.170	4,32	1.31	33	2.19	56	0.336	8,53
1	1.31	33	2.19	56	0.196	4,98	1.38	35	2.44	62	0.391	9,93
1 1/4	1.38	35	2.44	62	0.208	5,28	1.69	43	2.97	75	0.417	10,59
1 1/2	1.69	43	2.97	75	0.219	5,56	1.72	44	3.31	84	0.436	11,07
2	1.72	44	3.31	84	0.281	7,14	2.06	52	4.00	102	0.476	12,09
2 1/2	2.06	52	4.00	102	0.301	7,65	2.50	64	4.75	121	0.602	15,29
3	2.50	64	4.75	121	0.348	8,84	3.12	79	5.75	146	0.655	16,64
4	3.12	79	6.00	152	0.440	11,18	3.12	79	6.00	152	0.735	18,67

5" and 6" Available on request (Forgings available from stock) Manufacturer standard