


TEE CROSS

Té
Croix

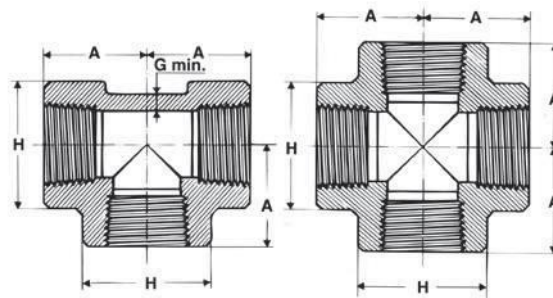



Class 3000 lbs. - 6000 lbs.
Dimensions: ASME B 16.11
Thread: ASME B 1.20.1

Nominal pipe size Diamètre nominal	3000						6000					
	A		H		G		A		H		G	
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
1/4	0.97	25	1.00	25	0.130	3,30	1.12	29	1.31	33	0.260	6,60
3/8	1.12	29	1.31	33	0.138	3,51	1.31	33	1.50	38	0.275	6,98
1/2	1.31	33	1.50	38	0.161	4,09	1.50	38	1.81	46	0.321	8,15
3/4	1.50	38	1.81	46	0.170	4,32	1.75	44	2.19	56	0.336	8,53
1	1.75	44	2.19	56	0.196	4,98	2.00	51	2.44	62	0.391	9,93
1 1/4	2.00	51	2.44	62	0.208	5,28	2.38	60	2.97	75	0.417	10,59
1 1/2	2.38	60	2.97	75	0.219	5,56	2.50	64	3.31	84	0.436	11,07
2	2.50	64	3.31	84	0.281	7,14	3.25	83	4.00	102	0.476	12,09
2 1/2	3.25	83	4.00	102	0.301	7,65	3.75	95	4.75	121	0.602	15,29
3	3.75	95	4.75	121	0.348	8,84	4.19	106	5.75	146	0.655	16,64
4	4.50	114	6.00	152	0.440	11,18	4.50	114	6.00	152	0.735	18,67

5" and 6" Available on request (Forgings available from stock) Manufacturer standard
Red. Tees & Red. Crosses – refer to page 69

COUPLING HALF-COUPLING

Manchon
Demi-manchon

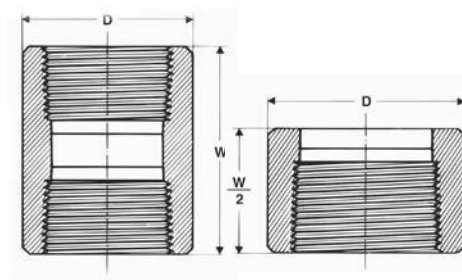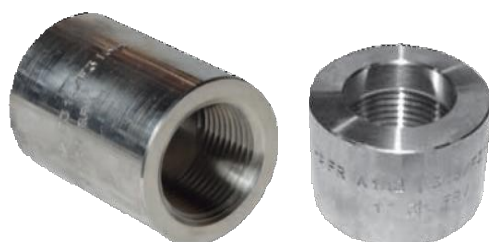

Class 3000 lbs. - 6000 lbs.
Dimensions: ASME B 16.11
Thread: ASME B 1.20.1

Nominal pipe size Diamètre nominal	3000				6000			
	W		D		W		D	
	inches	mm	inches	mm	inches	mm	inches	mm
1/4	1.38	35	0.75	19	1.38	35	1.00	25
3/8	1.50	38	0.88	22	1.50	38	1.25	32
1/2	1.88	48	1.12	28	1.88	48	1.50	38
3/4	2.00	51	1.38	35	2.00	51	1.75	44
1	2.38	60	1.75	44	2.38	60	2.25	57
1 1/4	2.62	67	2.25	57	2.62	67	2.50	64
1 1/2	3.12	79	2.50	64	3.12	79	3.00	76
2	3.38	86	3.00	76	3.38	86	3.62	92
2 1/2	3.62	92	3.62	92	3.62	92	4.25	108
3	4.25	108	4.25	108	4.25	108	5.00	127
4	4.75	121	5.50	140	4.75	121	6.25	159

5" and 6" Available on request (Forgings available from stock) Manufacturer standard