
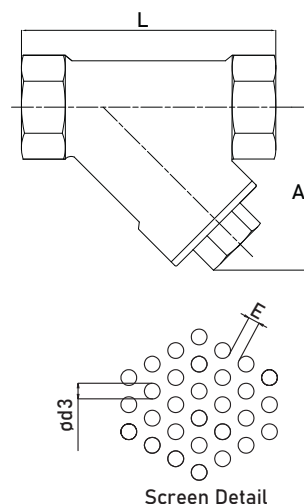


Filtri a y / "Y" type strainers



Screen Detail

Modello / Model

Materiale / Material
Aisi 316


DN
8 - 50

PN
40

Caratteristiche tecniche / Construction features

- Conessioni filettate gas femmina secondo / Threaded ends gas female according to EN 10226-1
- Pressione nominale di esercizio / Nominal working pressure 40 bar
- Temperatura di esercizio / Working temperature -30°C- +240°C

Diagramma pressione temperatura / Pressure temperature diagram

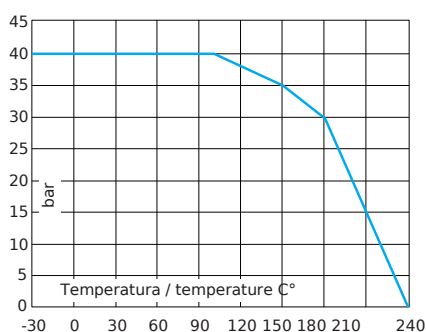

Componenti e materiali / Components and materials

1	Corpo / Body	Acciaio Inox / SS 1.4408
2*	Filtro / Strainer	Acciaio Inox Aisi 316 / SS Aisi 316
3*	Guarnizione / Gasket	PTFE
4	Tappo / Plug	Acciaio Inox / SS 1.4408

* Ricambi disponibili / Spare parts

Dimensioni e pesi / Dimensions and weights

Codice Code	Misura Size	DN	PN	Peso in kg. Weight in kg.	KV m³/h	Dimensioni in mm Dimensions in mm			
						A	L	Ød3	E
	1/4"	8	40	0,29	1,44	30	65	1,0	1,0
	3/8"	10	40	0,21	2,88	30	65	1,0	1,0
	1/2"	15	40	0,22	3,30	40	65	1,0	1,0
	3/4"	20	40	0,35	6,60	45	80	1,0	1,0
	1"	25	40	0,66	9,70	55	90	1,0	1,0
	1" 1/4	32	40	0,77	14,90	65	105	1,0	1,0
	1" 1/2	40	40	1,15	26,60	70	120	1,0	1,0
	2"	50	40	1,76	35,40	85	140	1,0	1,0

Su richiesta /
On request



Filettatura NPT / NPT thread