


TUBO PVC ARMOVIN

ARMOVIN PVC HOSE

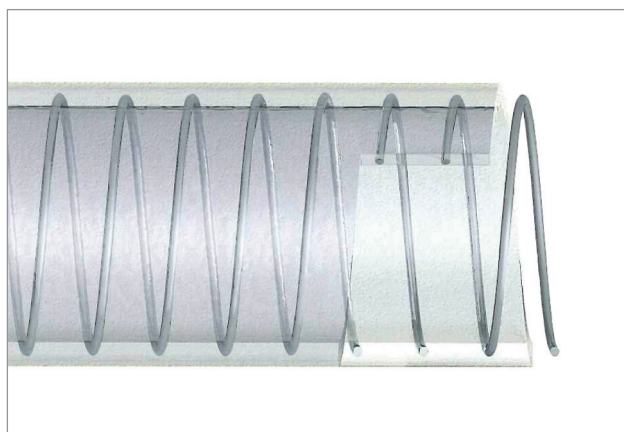

APPLICAZIONI

- Particolarmente idoneo per aspirazione e mandata liquidi.
- IDONEO per ALIMENTI secondo il **D.M. 21/03/73** e successive modifiche.

COSTRUZIONE

Tubo in PVC plastificato con inserita spirale di rinforzo in acciaio. Superficie interna ed esterna liscia. Molto flessibile. Resistente agli agenti atmosferici ed a molti prodotti chimici.

TEMPERATURE

Da -10°C a +60°C.

COLORE

Trasparente.

APPLICATIONS

- Particularly indicated for suction and delivery of liquids.
- Suitable for suction and delivery of alimentary liquids, in compliance with **D.M. 21/03/73** and following amendments.

CONSTRUCTION

Plasticized PVC hose reinforced through of incorporated steel spiral. Smooth inner and outer layers. Very flexible. Resistant to atmospherical agents and most chemicals.

TEMPERATURE RANGE

From -10°C to +60°C; +14°F to +140°F.

COLOUR

Transparent.

Ø interno Internal Ø mm	Ø esterno External Ø mm	Peso Weight gr/mt	Raggio curvatura Bending radius mm	*Pressione esercizio *Working pressure kg/cm ²	*Pressione scoppio *Burst pressure kg/cm ²	Depressione Vacuum m H ₂ O	Mt x roll
8	14	150	16	7	35	9.5	60
10	16	160	18	7	35	8.5	60
12	18	180	23	6	30	8.5	60
14	20	205	26	6	30	8.5	60
16	22.4	250	30	6	30	8.5	60
18	14.4	300	32	5	25	8.5	60
20	27	350	34	5	25	8.5	60
25	33	500	42	5	25	8.5	60
30	38	600	50	4	20	8.5	60
32	41	650	53	4	20	8.5	60
35	44	700	58	4	20	8.5	60
40	50	870	66	4	20	8.5	30
50	60	1250	82	4	20	8	30
60	72	1700	130	3.5	18	8	30
70	83	1950	151	3.5	18	7	30
80	93	2350	172	3.5	18	7	20
90	104	2900	192	3	15	7	20
102	116	3250	215	2.5	12	7	20

***I dati tecnici sopra menzionati si riferiscono ad applicazione a temperatura ambiente (20°C).**

***Above technical data are referring to application at room temperature (20°C).**

A richiesta versione BIO.

BIO version upon request.